





REV NO.	DATE	REVISION	DR	CH	APP
△					

SPECIFICATION



1. Rating : 150mA, DC 42V (Switching)
200mA, DC 42V (None-Switching)
2. Contact Resistance : 80mΩ Max
3. Insulation Resistance : 100MΩ Min at DC 250V
4. Operating Force : 700gf Max
5. Life cycle : 10,000 steps
6. Sealing : IP67 (Dust & Water proof)
7. Packing : 50pcs Tube

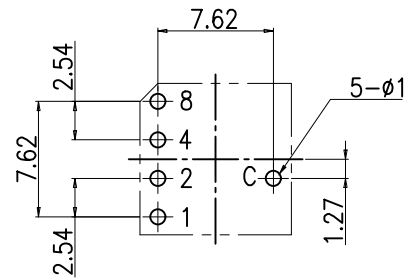

P.C.B DIMENSION (Top View)



ACTUATOR

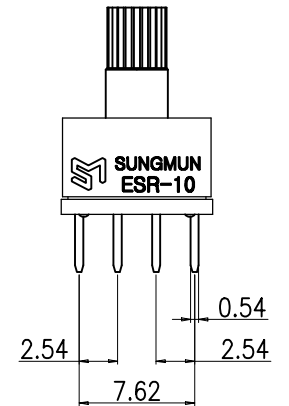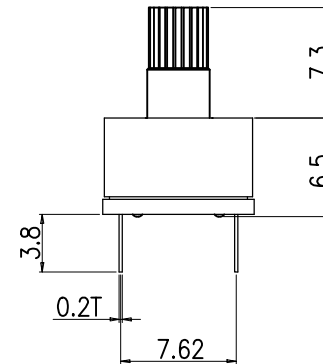

Real Coded						
	C	1	2	4	8	
0	●					0
1	●	●				1
2	●		●			2
3	●	●	●			3
4	●			●		4
5	●	●		●		5
6	●		●	●		6
7	●	●	●	●		7
8	●				●	8
9	●	●			●	9

10
P
o
s
i
t
i
o
n

DRAW/DESIGNED	CHECKED	APPROVED	UNIT	G.TOL	TITLE	ROTARY DIP SWITCH	
H.S LEE	K.N KIM	W.J LEE		—	MODEL NO.	ESR-10	REV.
2023-09-22	2023-09-22	2023-09-22	mm	N:S	DRAW NO.	ESR-10(LG)-01	01
邦斯达 BONS DA				A4	www.zigeng.com		

Din ISO-2768-1m					
Ranges	0.5~3	3~6	6~30	30~120	120~400
Tolerance	±0.1	±0.1	±0.2	±0.3	±0.5

邦斯达 BONS DA 深圳市子庚科技有限公司