





REV NO.	DATE	REVISION	DR	CH	APP
△					

SPECIFICATION




- Rating : 25mA, DC 12V (Switching)
25mA, DC 24V (None-Switching)
- Contact Resistance : 100mΩ Max
- Insulation Resistance : 100MΩ Min at DC 250V
- Operating Force : 700gf Max
- Life cycle : 10,000 steps
- Sealing : IP67 (Dust & Water proof)
- Packing : 50pcs Tube

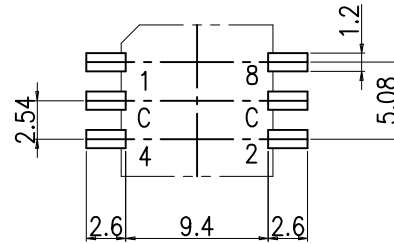

P.C.B DIMENSION (Top View)



ACTUATOR

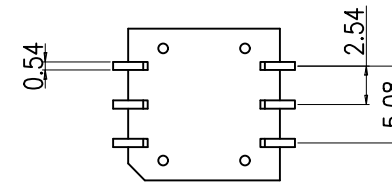

10 P o s i t i o n	Real Coded					0
	C	1	2	4	8	
0	●					0
1	●	●				1
2	●		●			2
3	●	●	●			3
4	●			●		4
5	●	●		●		5
6	●		●	●		6
7	●	●	●	●		7
8	●				●	8
9	●	●			●	9

Din ISO-2768-1m					
Ranges	0.5~3	3~6	6~30	30~120	120~400
Tolerance	±0.1	±0.1	±0.2	±0.3	±0.5

DRAW/DESIGNED	CHECKED	APPROVED	UNIT	G.TOL	TITLE	ROTARY DIP SWITCH	
H.S LEE	K.N KIM	W.J LEE		mm	--		
2023-09-18	2023-09-18	2023-09-18		SCALE	MODEL NO.	UASR-10S	REV.
邦斯达 BONS DA Electronics 深圳市子庚科技有限公司				SIZE	DRAW NO.	UASR-10S(LG)-01	01
				A4			