




REV NO.	DATE	REVISION	DR	CH	APP
△					

SPECIFICATION

- Rating : 100mA, DC 5V (Switching)
100mA, DC 50V (None-Switching)
- Contact Resistance : 100mΩ Max
- Insulation Resistance : 100MΩ Min at DC 100V
- Operating Force : 200gf Max
- Life cycle : 25,000 steps
- Sealing : IP67 (Dust & Water proof)
- Packing : 70pcs Tube / 800pcs Reel Packing

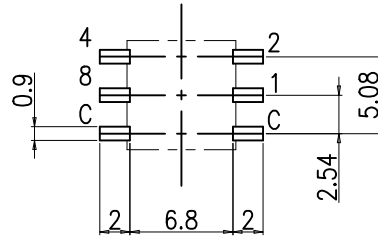


P.C.B DIMENSION (Top View)






Real Coded						
	C	1	2	4	8	
0	●					0
1	●	●				1
2	●		●			2
3	●	●	●			3
4	●			●		4
5	●	●		●		5
6	●		●	●		6
7	●	●	●	●		7
8	●				●	8
9	●	●			●	9
10	●		●		●	A
11	●	●	●		●	B
12	●			●	●	C
13	●	●		●	●	D
14	●		●	●	●	E
15	●	●	●	●	●	F

16
P
o
s
i
t
i
o
n

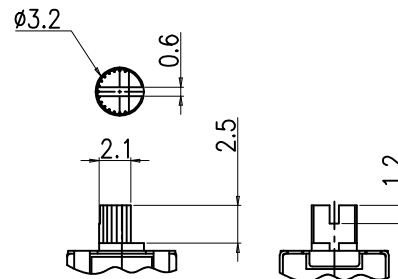

ACTUATOR



DRAW/DESIGNED	CHECKED	APPROVED		G.TOL	TITLE	COMPACT ROTARY DIP SWITCH	
H.S LEE	K.N KIM	W.J LEE	UNIT	SCALE	MODEL NO.	GSMR-16S	
2023-09-25	2023-09-25	2023-09-25	mm	N:S	DRAW NO.	GSMR-16S(LG)-01	
				SIZE			REV.
				A4			01

Din ISO-2768-1m					
Ranges	0.5~3	3~6	6~30	30~120	120~400
Tolerance	±0.1	±0.1	±0.2	±0.3	±0.5

邦斯达 BONSDA Electronics 深圳市子庚科技有限公司