

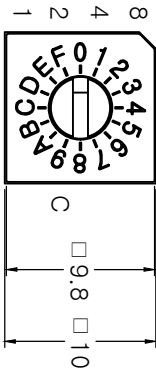



MRK.	DATE	REVISION	SIGN
△			

SPECIFICATION



1. Rating : 25mA, DC 12V (Switching)
25mA, DC 24V (None-Switching)
2. Contact Resistance : 100mΩ Max
3. Insulation Resistance : 100MΩ Min at DC 250V
4. Operating Force : 700gf Max
5. Life cycle : 10,000 steps
6. Sealing : IP67 (Dust & Water proof)
7. Packing : 50pcs Tube

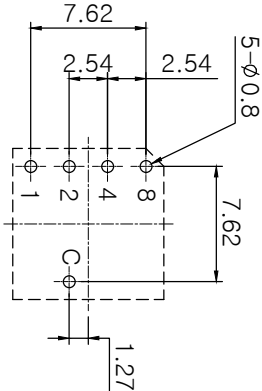

P.C.B DIMENSION (Top View)




ACTUATOR



Real Code								
	C	1	2	4	8			
0	●					0		
1	●	●				1		
2	●		●			2		
3	●	●	●			3		
4	●			●		4		
5	●	●		●		5		
6	●		●	●		6		
7	●		●	●		7		
8	●				●	8		
9	●	●			●	9		
10	●		●		●	A		
11	●	●	●		●	B		
12	●			●	●	C		
13	●	●		●	●	D		
14	●		●	●	●	E		
15	●	●	●	●	●	F		

16 Positions



DRAW/DESIGNED		CHECKED		APPROVED			G.TOL ±0.3	TITLE		
J.S YANG		W.J LEE		K.I LEE				ROTARY DIP SWITCH		
2022-01-07		2022-01-07		2022-01-07		UNIT mm	SCALE 2:1	MODEL NO.	HAMR-16	REV. 03
BONSDA 深圳市子庚科技有限公司						SIZE A4	DRAW NO.	HAMR-16-03		