





MRK.	DATE	REVISION	SIGN
△			

SPECIFICATION



1. Rating : 25mA, DC 12V (Switching)
25mA, DC 24V (None-Switching)
2. Contact Resistance : 100mΩ Max
3. Insulation Resistance : 100MΩ Min at DC 250V
4. Operating Force : 700gf Max
5. Life cycle : 10,000 steps
6. Sealing : IP67 (Dust & Water proof)
7. Packing : 50pcs Tube / 200pcs Reel Packing

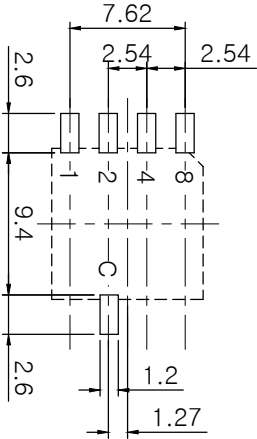

P.C.B DIMENSION (Top View)




ACTUATOR

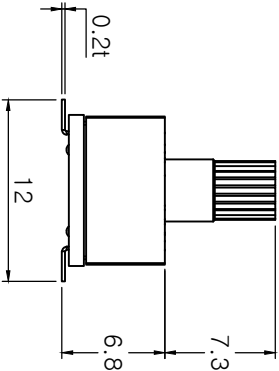

Reel Code								
	C	1	2	4	8			
0	●					0		
1	●	●				1		
2	●		●			2		
3	●	●	●			3		
4	●			●		4		
5	●	●		●		5		
6	●		●	●		6		
7	●		●	●		7		
8	●				●	8		
9	●	●			●	9		
10	●		●		●	A		
11	●	●	●		●	B		
12	●			●	●	C		
13	●	●		●	●	D		
14	●		●	●	●	E		
15	●	●	●	●	●	F		

16 Positions



DRAW/DESIGNED	CHECKED	APPROVED	G.TOL		TITLE	REV.
J.S YANG	W.J LEE	K.I LEE	±0.3	SCALE	ROTARY DIP SWITCH	
2022-01-07	2022-01-07	2022-01-07	UNIT	2:1	MODEL NO.	
BONSODA ELECTRONICS			mm		ESR-16S	
深圳市子庚科技有限公司			SIZE		ESR-16S-03	
			A4		DRAW NO.	03