





MRK.	DATE	REVISION	SIGN
------	------	----------	------

SPECIFICATION




1. Rating : 25mA, DC 12V (Switching)
25mA, DC 24V (None-Switching)
2. Contact Resistance : 100mΩ Max
3. Insulation Resistance : 100MΩ Min at DC 250V
4. Operating Force : 700gf Max
5. Life cycle : 10,000 steps
6. Sealing : IP67 (Dust & Water proof)
7. Packing : 50pcs Tube

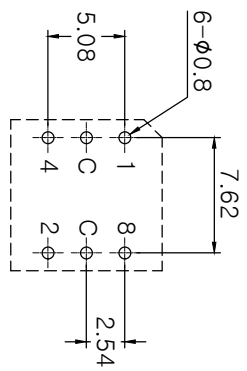

P.C.B DIMENSION (Top View)

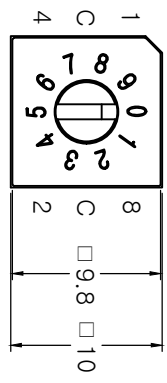

ACTUATOR

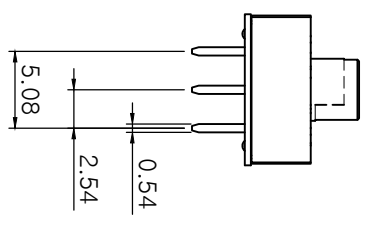

Real Code	
C	1
0	2
1	4
2	8
3	
4	
5	
6	
7	
8	
9	

DRAW/DESIGNED	CHECKED	APPROVED		G.TOL	TITLE	ROTARY DIP SWITCH
J.S YANG	W.J LEE	K.I LEE		±0.3	UMR-10	
2022-01-05	2022-01-05	2022-01-05	UNIT	SCALE	MODEL NO.	REV.
			mm	2:1	UMR-10-03	03
BONSODA 深圳市子庚科技有限公司			SIZE	DRAW NO.		
			A4			