





MRK.	DATE	REVISION	SIGN
------	------	----------	------

SPECIFICATION



1. Rating : 25mA, DC 12V (Switching)
25mA, DC 24V (None-Switching)
2. Contact Resistance : 100mΩ Max
3. Insulation Resistance : 100MΩ Min at DC 250V
4. Operating Force : 700gf Max
5. Life cycle : 10,000 steps
6. Sealing : IP67 (Dust & Water proof)
7. Packing : 50pcs Tube

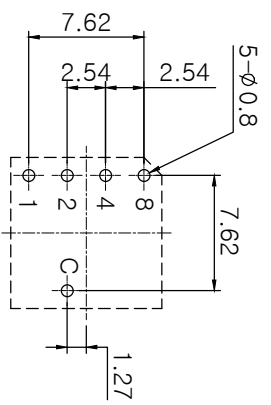


P.C.B DIMENSION (Top View)

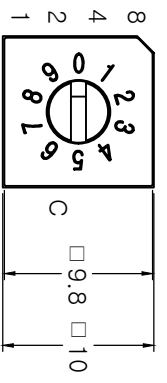

ACTUATOR

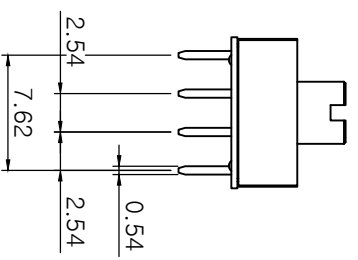

Real Code	
C	1 2 4 8
0	●
1	●
2	●
3	●
4	●
5	●
6	●
7	●
8	●
9	●



DRAW/DESIGNED	CHECKED	APPROVED		G.TOL	TITLE	REV.
J.S YANG	W.J LEE	K.I LEE	UNIT	±0.3	ROTARY DIP SWITCH	
2022-01-06	2022-01-06	2022-01-06	mm	SCALE	MODEL NO.	
				2:1	HAMR-10	
			SIZE	A4	DRAW NO.	03
					HAMR-10-03	



BONSDA 深圳市子庚科技有限公司