
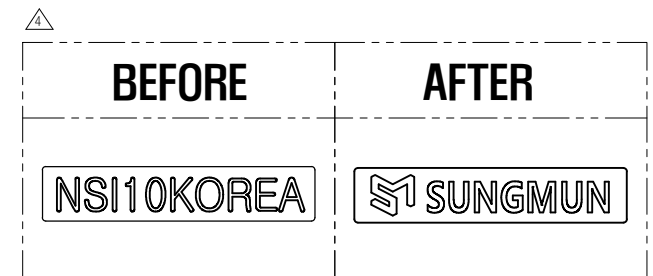


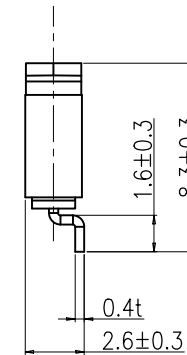
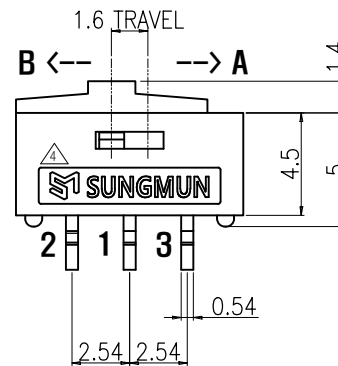




REV NO.	DATE	REVISION	DR	CH	APP
△	22.12.06	CHANGE THE MARKING	H.S LEE	K.N KIM	W.J LEE
△	23.09.18	DIN ISO-2768-1m tolerance applied	H.S LEE	K.N KIM	W.J LEE

# SPECIFICATION

1. Rating : DC12V 0.5A~24V 0.3A.
2. Contact Resistance : 30mΩ Max.
3. Travel : 1.6mm.
4. Operating Force : 250gf ± 150gf.
5. Life Cycle : 2,000 Cycle (with load).
6. Packing : 200pcs Vinyl Bag / 1,500pcs Reel Packing



Din ISO-2768-1m						DRAW/DESIGNED	CHECKED	APPROVED	G.TOL	TITLE		
Ranges	0.5~3	3~6	6~30	30~120	120~400	J.S YANG	W.J LEE	K.J LEE	±0.3	MINI SLIDE SWITCH		
Tolerance	±0.1	±0.1	±0.2	±0.3	±0.5	2021-11-15	2021-11-15	2021-11-15	UNIT	MODEL NO.	NSI-10HS	REV.
									mm	NO.		
						SUNG MUN ELECTRONICS CO.,LTD			SCALE	SIZE	NSI-10HS-05	05
					3:1				A4	NO.		