




REV NO.	DATE	REVISION	DR	CH	APP
△					

SPECIFICATION

- Rating : 100mA, DC 42V (Switching)
400mA, DC 42V (None-Switching)
- Contact Resistance : 80mΩ Max
- Insulation Resistance : 100MΩ Min
- Operating Force : Max 250gf·cm
- Life cycle : 25,000 steps
- Sealing : IP67 (Dust & Water proof)
- Packing : 65pcs Tube

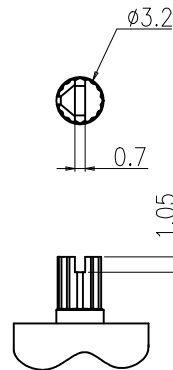


ACTUATOR


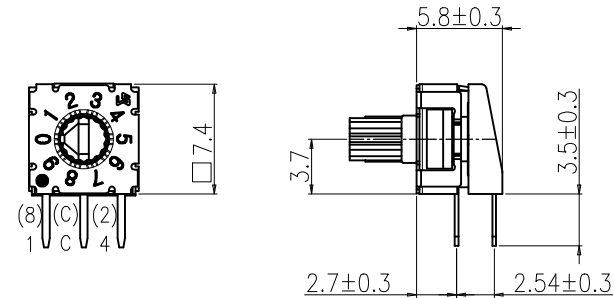


		Real Coded				
		C	1	2	4	8
0	●					
1	●	●				
2	●		●			
3	●	●	●			
4	●			●		
5	●	●			●	
6	●		●	●		
7	●	●	●	●		
8	●					●
9	●	●				●

10
P
o
s
i
t
i
o
n



P.C.B DIMENSION (Top View)



Din ISO-2768-1m					
Ranges	0.5~3	3~6	6~30	30~120	120~400
Tolerance	±0.1	±0.1	±0.2	±0.3	±0.5

DRAW/DESIGNED	CHECKED	APPROVED	G.TOL	TITLE		
W.R KYUNG	B.S KANG	K.I LEE	±0.3mm	MINI ROTARY DIP SWITCH		
2024-03-28	2024-03-28	2024-03-28	UNIT: mm	SCALE: N-S	MODEL NO.	REV.
				SIZE: A4	DRAW NO.	
					MSSR-10H1(LG)-01	01