




REV NO.	DATE	REVISION	DR	CH	APP
△					

SPECIFICATION

- Rating : 100mA, DC 5V (Switching)
100mA, DC 50V (None-Switching)
- Contact Resistance : 100mΩ Max
- Insulation Resistance : 100MΩ Min at DC 100V
- Operating Force : 200gf Max
- Life cycle : 25,000 steps
- Sealing : IP67 (Dust & Water proof)
- Packing : 70pcs Tube / 1,300pcs Reel Packing


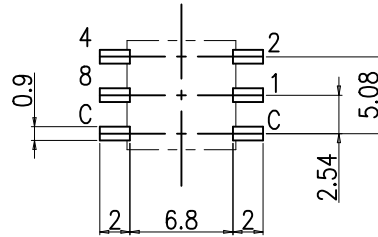


P.C.B DIMENSION (Top View)






Real Coded					
	C	1	2	4	8
0	●				
1	●	●			
2	●		●		
3	●	●	●		
4	●			●	
5	●	●		●	
6	●		●	●	
7	●	●	●	●	
8	●				●
9	●	●			●
10	●		●		●
11	●	●	●		●
12	●			●	●
13	●	●		●	●
14	●		●	●	●
15	●	●	●	●	●

16
P
o
s
i
t
i
o
n



ACTUATOR



Din ISO-2768-1m					
Ranges	0.5~3	3~6	6~30	30~120	120~400
Tolerance	±0.1	±0.1	±0.2	±0.3	±0.5

DRAW/DESIGNED	CHECKED	APPROVED	UNIT	G.TOL	TITLE	MODEL NO.	REV.
H.S LEE	K.N KIM	W.J LEE	mm	—	COMPACT ROTARY DIP SWITCH	GSER-16S	
2023-09-25	2023-09-25	2023-09-25		N-S		GSER-16S(ILG)-01	01
SUNG MUN ELECTRONICS CO.,LTD				SCALE	DRAW NO.		
				A4			